

2MP Network IR Fixed Dome Camera

IPC3612SR3 Series



Key Features

Optics

- Day/night 기능
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 방사거리 30 m (98 ft)
- 3D WNR (광학 역광 보정)

Compression

- H.264/MJPEG
- 트리플 스트리밍
- 9:16 복도 모드

Network

- ONVIF


Structure

- POE 지원
- 허용전압 : $\pm 25\%$
- 4 KV 서지보호 네트워크 인터페이스
- IP66

Specifications

	IPC3612SR3-PF28	IPC3612SR3-PF36	IPC3612SR3-PF60
Camera			
센서	1/3", 2 megapixel, progressive scan, CMOS		
렌즈	2.8mm@F1.8 Angle of view(H): 99.1°	3.6mm@F1.8 Angle of view(H): 76.7°	6mm@F1.8 Angle of view(H): 46.9°
최저조도	Colour: 0.06 Lux (F1.8, AGC ON) 0 Lux with IR		
전자 셔터	Auto/Manual, 1/6~1/8000 s		
Day/Night	IR-cut filter with auto switch (ICR)		
IR	30m (98 ft) IR range		
AWB(자동 백광 조정)	Auto/manual		
Gain Control	Auto/manual		
WDR	Supported		
노이즈 감소	2D/3D		
Video			
최대 해상도	1920×1080		
비디오 압축	H.264/MJPEG		
프레임 레이트	1080P (1920×1080): Max. 30 fps; 720P (1280×720): Max. 30 fps; D1 (720×576): Max. 25 fps		
비디오 스트리밍	트리플		
사용자 OSD 편집지역	Up to 8 OSDs		
9:16 복도 모드	Supported		
모션 감지	Up to 2 areas		
사생활 보호 영역설정	Up to 4 areas		
Network			
프로토콜	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, Qos, DNS, DDNS, NTP, FTP, UPnP, HTTP		
호환 프로토콜	ONVIF, API		
Interface			
네트워크	10M/100M Base-TX Ethernet		
General			
전원	12 V DC, or PoE (IEEE802.3 af)		
	Power consumption: 3.5 W (5.5W with IR on)		
치수 (Ø x H)	Ø126 x 94 mm (Ø5.0" x 3.7")		
무게	0.33 kg (0.73 lb)		
사용 환경	-35°C ~ +60°C (-31°F ~ 140°F), Humidity ≤ 90% RH(non-condensing)		
IP 등급	IP66		
서지 보호 회로	4KV		

Dimensions

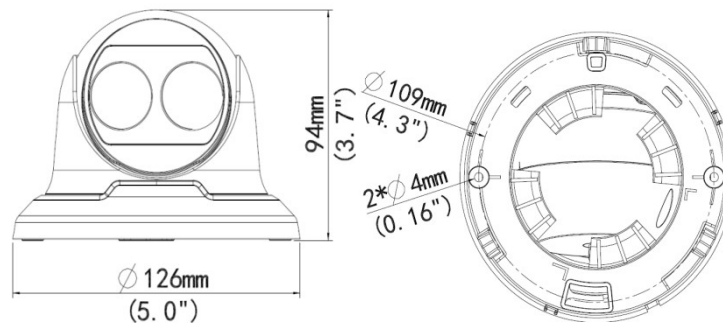

Accessories

Installation mode	Accessories	Description
Ceiling mount	Mounting pedestal is included in the product package	For indoor ceiling installation

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.