

DVS4104



Key Features


- 4 channel video and audio inputs
- H.264 video compression
- Full channel 960H realtime encoding
- Dual-stream

Specifications


DVS4104	
Video	
Video Input	4-ch,BNC
Video Standard	H.264
Video bit rate	960H/D1: 512 Kbit/s - 8192 Kbit/s、 2CIF: 256 Kbit/s - 4096 Kbit/s; CIF: 128 Kbit/s - 1024 Kbit/s
Video stream	1) H.264 single stream; 2) H.264 + H.264 dual streams
Audio	
Input	4-ch
Output	1-ch
Audio Standard	G.711μ
Sound track	Mono
Mute	You can choose mute
External Interface	
Network Interface	2 RJ45 10M/100M adaptive Ethernet Interface
SFP interface	2 1000Base-Fx SFP
EPON interface	1 100Mbps EPON subcard(optional)
USB Interface	1 USB2.0 interfaces
Serial Interface	1 RS-232, 2 RS-485

Alarm Input	4-ch
Alarm Output	2-ch
General	
Power Supply	12 VDC
Consumption	10 W (with subcard)
Working Temperature	-10°C ~ + 60°C (14°F ~ 140°F)
Working Humidity	10% ~ 90%
Weight	1.5 kg / 3.3 lb
Dimensions (W x D x H)	40.0 × 250.0 × 188.6 mm (1.57" × 9.84" × 7.43")

Dimensions

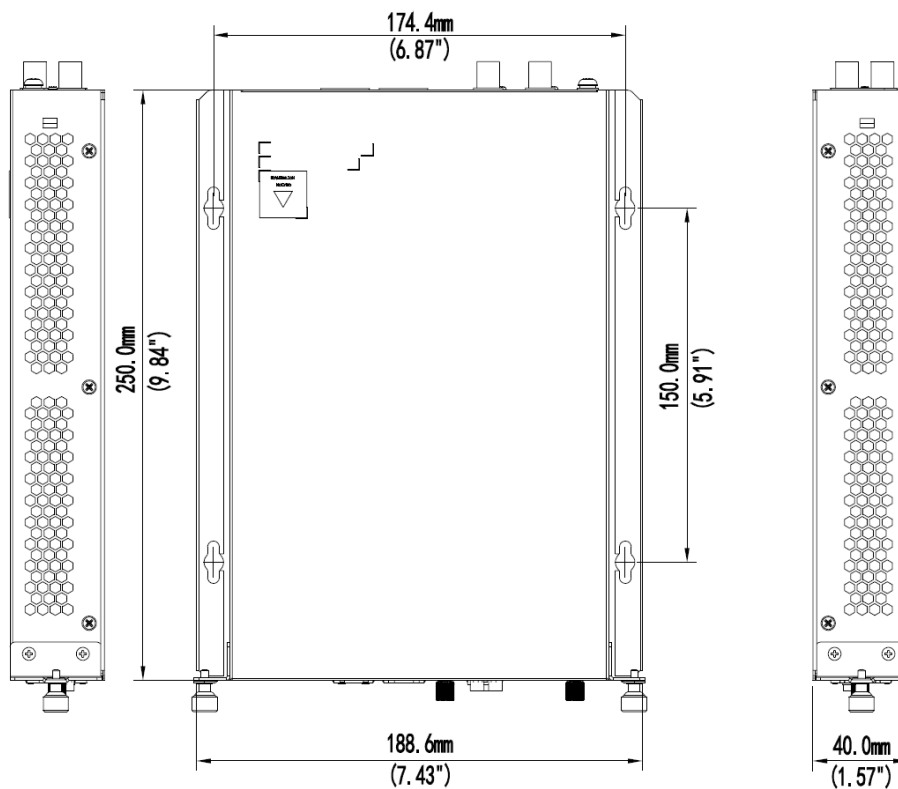


Rear Panel

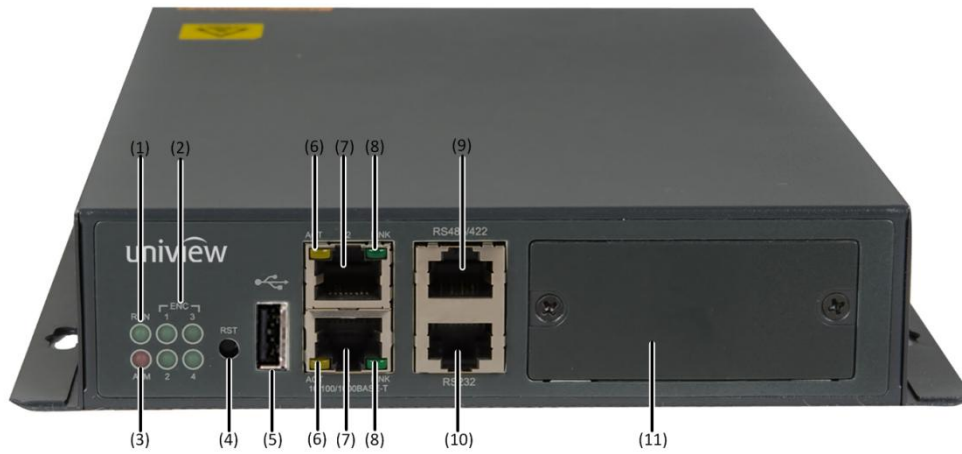

Front view

(1) Running LED	(2) Encoding LED	(3) Alarm LED
(4) Reset button	(5) USB Port	(6) Active LED
(7) Ethernet Port	(8) Link LED	(9) RS-485 Port
(10) RS-232 Port	(11) Subcard Slot	

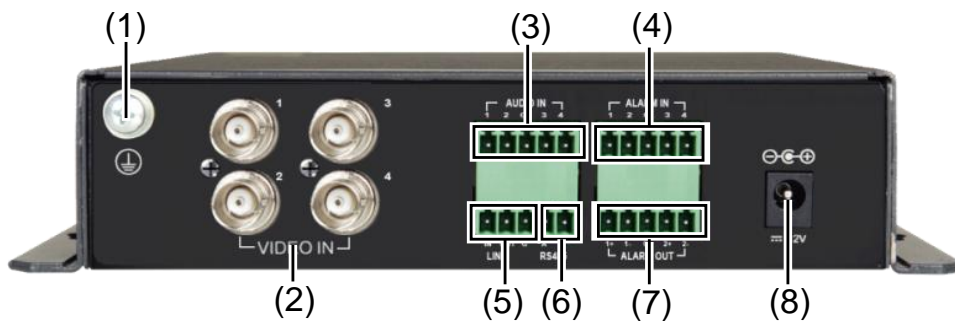

Rear view

(1) GND	(2) Video In Port	(3) Audio In Port
(4) Alarm In Port	(5) Line In Port	(6) RS-485 Port
(7) Alarm Out Port	(8) Power Input	

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.