

# DVS4116



## Key Features


- 16 channel video and audio inputs
- H.264 video compression
- Full channel 960H realtime encoding
- Dual-stream

## Specifications

DVS4116	
<b>Video</b>	
Video Input	16-ch,BNC
Video Standard	H.264
Video bit rate	960H/D1: 512 Kbit/s - 8192 Kbit/s、 2CIF: 256 Kbit/s - 4096 Kbit/s; CIF: 128 Kbit/s - 1024 Kbit/s
Video stream	1) H.264 single stream; 2) H.264 + H.264 dual streams
<b>Audio</b>	
Input	16-ch
Output	1-ch
Audio Standard	G.711μ
Sound track	Mono
Mute	You can choose mute
<b>External Interface</b>	
Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet Interface
USB Interface	1 USB2.0 interfaces
Serial Interface	1 RS-232, 1 RS-485
Alarm Input	8-ch
Alarm Output	2-ch
<b>General</b>	
Power Supply	100~240 VAC
Consumption	20 W (with subcard)

Working Temperature	-10°C ~ + 55°C (14°F ~ 131°F)
Working Humidity	10% ~ 90%
Weight	3.0 kg / 6.6 lb
Dimensions (W x D x H)	482.6 × 240.0 × 43.6 mm (19.00" × 9.45" × 1.72")

## Dimensions

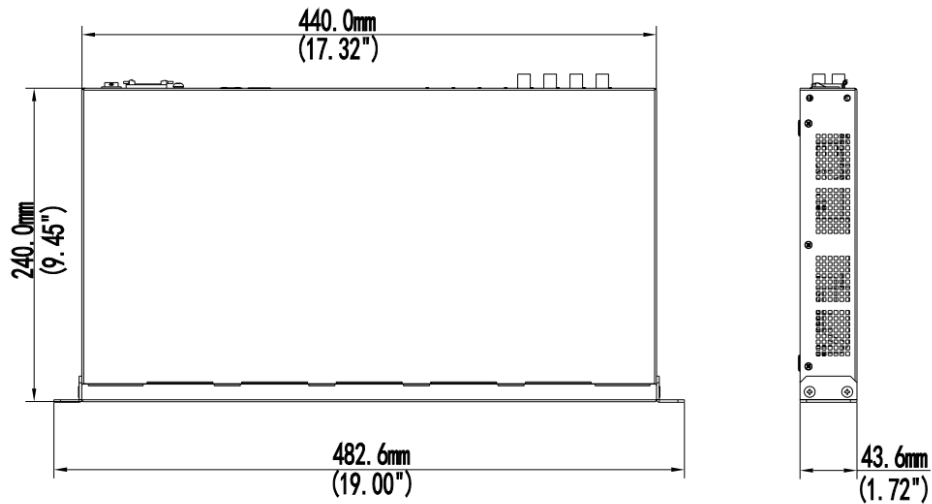


## Rear Panel



Front view

(1) Running LED	(2) Alarm LED	(3) Encoding LED
-----------------	---------------	------------------

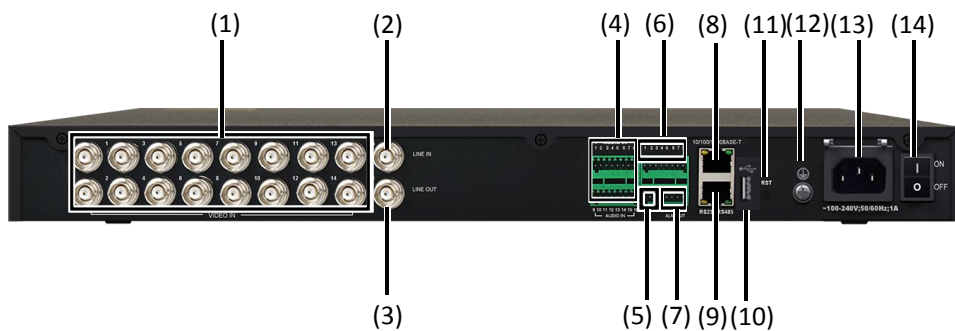

Rear view

(1) Video In Port	(2) Line In Port	(3) Line Out port
-------------------	------------------	-------------------

(4) Audio In Port	(5) GND	(6) Alarm In Port
(7) Alarm Out Port	(8) Ethernet Port	(9) RS232/RS485 port
(10) USB Port	(11) Reset Button	(12) GND
(13) Power Input	(14) Power On/Off	

**Zhejiang Uniview Technologies Co., Ltd.**

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.