

Network Video Recorder

NVR201E




Key Features

- 4/8-channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Up to 4 Megapixels resolution recording
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6 TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access


Specifications

	NVR201-04E	NVR201-08E
Video and Audio		
IP Video Input	4-ch	8-ch
Two-way audio Input	1-ch, RCA	
Network		
Incoming bandwidth	40Mbps	80Mbps
Outgoing bandwidth	96Mbps	
Remote connection	128	
Video/Audio Output		
HDMI/VGA Output	HDMI/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
Audio Output	1-ch, RCA	
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Synchronous Playback	4-ch	8-ch
Decoding		
Compression	H.264	
Live view/ Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	2 x 4MP@20, 4 x 1080p@25, 8 x 720p@25	
Hard Disk		
SATA	1 SATA interface	
Capacity	up to 6TB for each disk	
External Interface		
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	
Network Function	HTTP, TCP/IP, IPV4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, IP Server, P2P	
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0	
General		
Power Supply	12V DC	
Consumption (without HDD)	≤ 8 W	
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)	
Working Humidity	10% ~ 90%	
Dimensions	44 × 360 × 254mm (1.7" × 14.2" × 25.4")	
Weight (without HDD)	≤ 1.39 Kg (3.06 lb)	

Dimensions

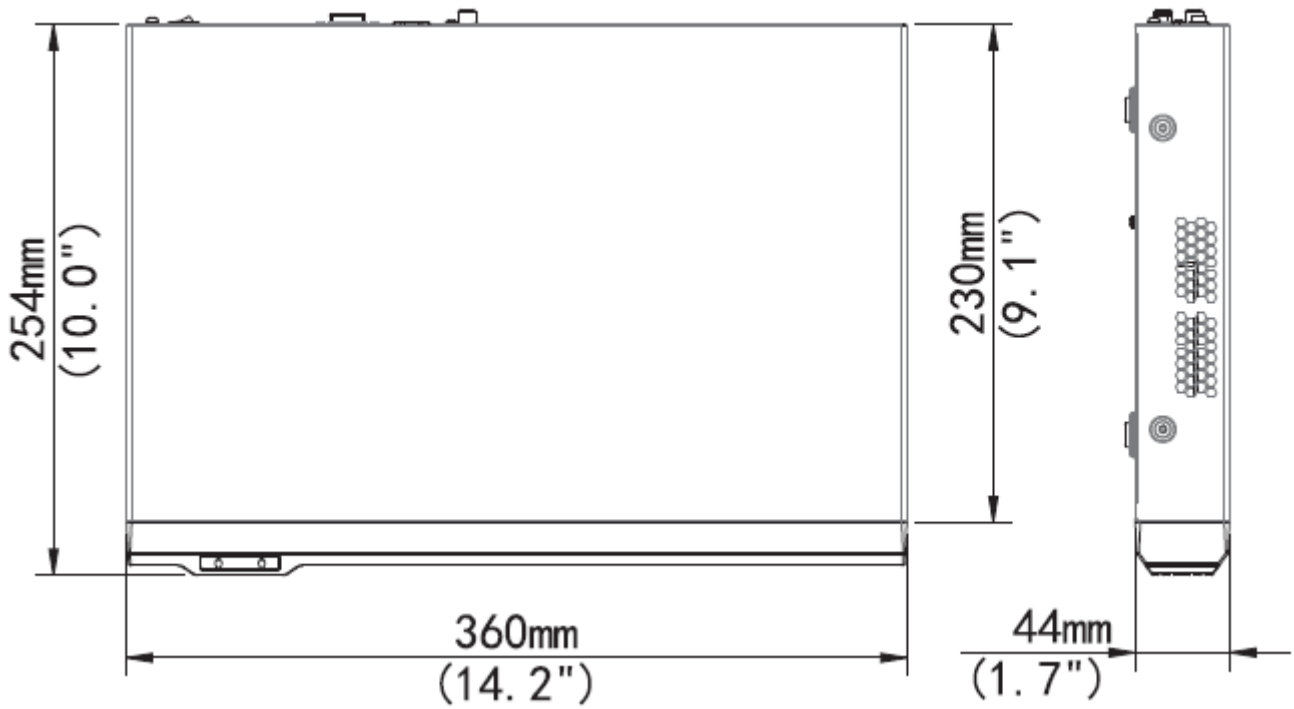

Rear Panel

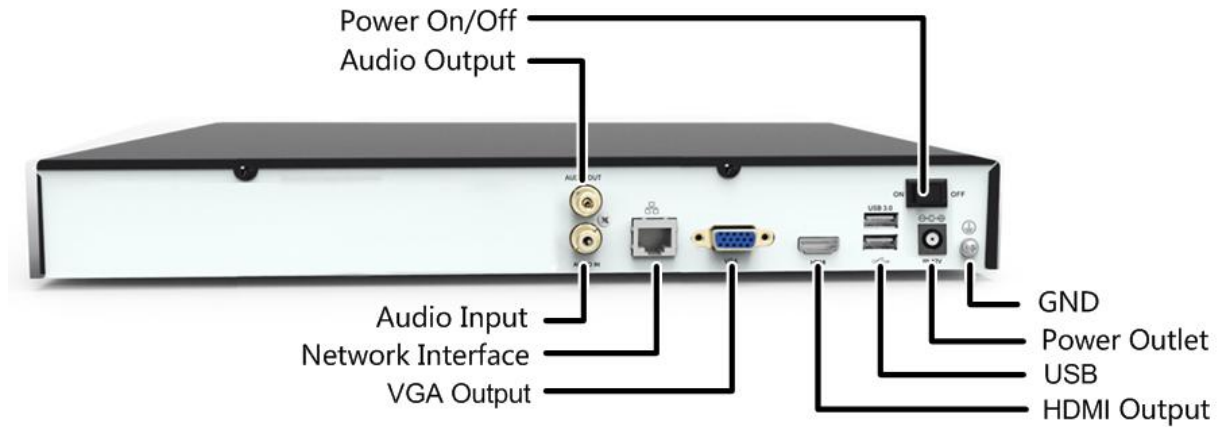

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2016 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.