

Network Video Recorder

NVR304E Series



Key Features

16/32-channel input

Third-party IP cameras supported with ONVIF conformance

Support 2-ch HDMI, 1-ch VGA, HDMI2 at up to 4K(3840x2160) resolution

Up to 12 Megapixels resolution recording

○ Support H.265/H.264 video formats

Accurate retrieval, instant playback

4 SATA HDD up to 24 TB


Support for P2P, UPnP, NTP, DHCP, PPPoE

Support for mobile client access


Specifications

	NVR304-16E	NVR304-32E
Video and Audio		
IP Video Input	16-ch	32-ch
Two-way audio Input	1-ch, RCA	
Network		
Incoming bandwidth	160Mbps	320Mbps
Outgoing bandwidth	320Mbps	
Remote connection	128	
Video/Audio Output		
HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
Audio Output	1-ch, RCA	
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Synchronous Playback	16-ch	
Decoding		
Compression	H.265/H.264	
Live view/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	4 x 12MP@20, 4 x 4K@30, 8 x 4MP@20, 16 x 1080p@25, 32 x 720p@25	
Hard Disk		
SATA	4 SATA interfaces	
Capacity	up to 6TB for each disk	
External Interface		
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces	
Network Function	HTTP, TCP/IP, IPV4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, IP Server, P2P	
Serial Interface	1 x RS-485	
USB Interface	Front panel: 1 x USB2.0 Rear panel: 1 x USB2.0, 1 x USB3.0	
Alarm In	16-ch	
Alarm Out	4-ch	
General		
Power Supply	12V DC	
Consumption (without HDD)	≤ 12 W	
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)	
Working Humidity	10% ~ 90%	
Dimensions	44 × 440 × 344mm (1.7" × 17.3" × 13.5")	
Weight (without HDD)	≤ 3.14 Kg (6.92 lb)	

Dimensions

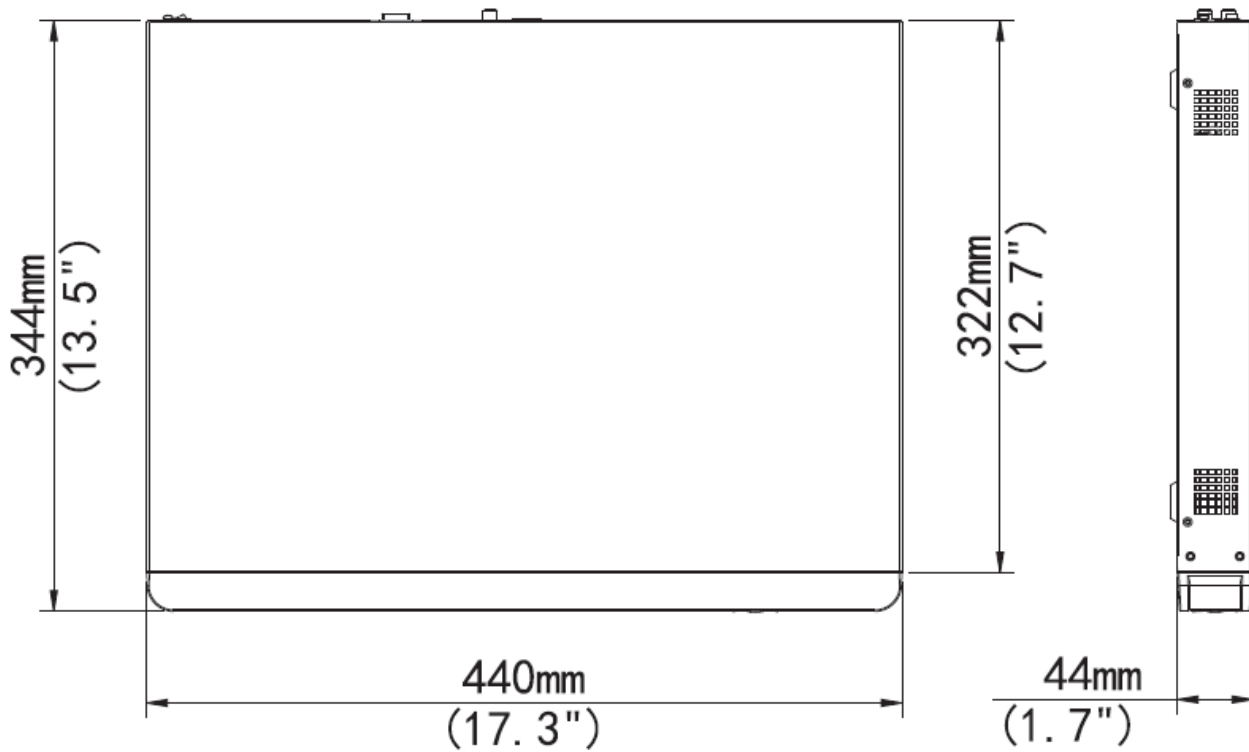

Rear Panel

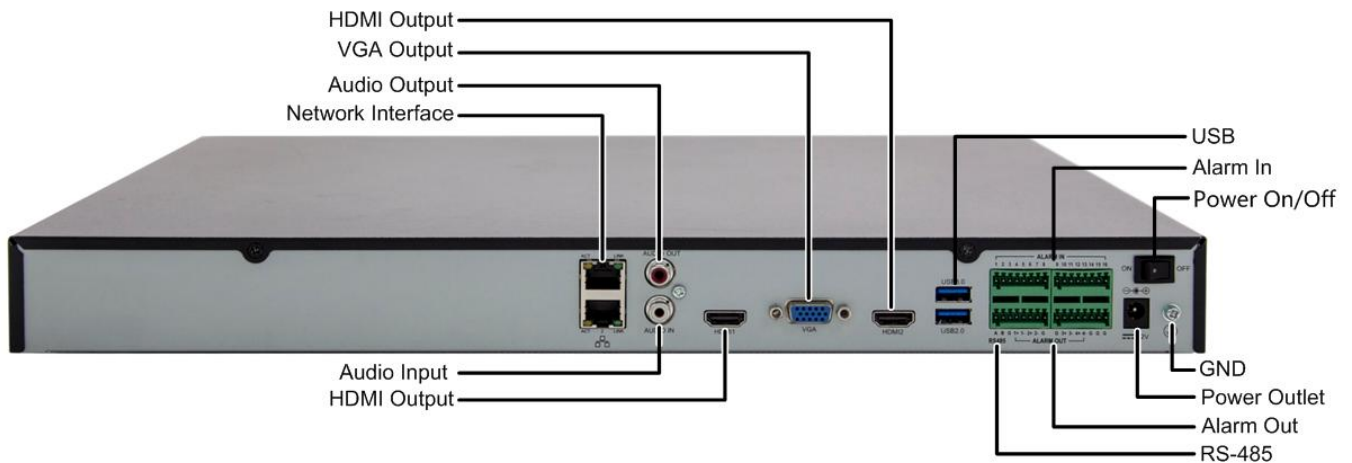

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2016 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.